



RUBBER FLOORING

RUBBER FLOORING

Rubber flooring in general

Rubber floors are naturally flexible and can withstand high walking loads and are also resistant to water and moisture. The rubber is typically non-conductive and absorbs vibrations well. They are great for shock absorption and are therefore popular in hockey stadiums, on shelves, gym areas, etc. Walking on the floor counteracts fatigue.

Applications

Interior and exterior floors
Pads for heavy metal objects
Floors in hockey stadiums and fitness centers
For car workshops with oil
Shelf protection pads
Floors for pets

Available features - general properties (anti-slip, vibration damping, flexibility, durability, easy maintenance), flame retardant, oil resistant, resistance to high temperatures and UV radiation, increased abrasion resistance.


Available in various thicknesses and harnesses.
Packed in 10m rolls.

AVAILABLE COLORS



AVAILABLE PROFILES

Pattern S8, Pattern S4, Pattern S3, Pattern S7,
Pattern S6, Pattern S5, Pattern S2, Pattern S1

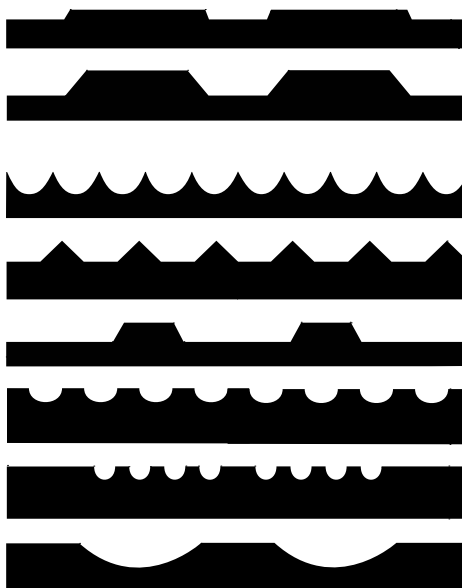

The bottom side has always a textile imprint, which ensures a better adhesion to the surfaces.

AVAILABLE APPLICATIONS



Flooring for non-aggressive interior environments. The hardness of the standard version is 80 Shore, which means high dimensional and dimensional stability and resistance to mechanical damage. Made of SBR and NR rubbers.



Flooring for indoor environments, in which the floor regularly comes into contact with mineral oils (NBR45 series) and gasoline, resp. isooctanes (higher NBR72 series). Made of NBR synthetic rubbers.



Interior and exterior flooring, resistant to high temperatures, weathering, UV radiation, acid and alkalis. In hardness 80 Sh A (EPDM96 series), 70 Sh A (EPDM95 series) and 60 Sh A (EPDM15 series). Made of synthetic EPDM rubbers.




Tile in the classic money pattern S-8. Suitable for environments where there is a higher risk of fire. According to the EN13501 standard, it is classified as a non-flammable building material in class C_s-s1.

S8 — CB	4
S4 — SBR76	5
S4 — SBR+ Flame retardant	6
S3 — SBR-BLACK	7
S8 — SBR-COLOR	8
S8 — SBR-BLACK	9
S7 — SBR-COLOR	10
S7 — SBR-BLACK	11
S6 — SBR-COLOR	12
S6 — SBR-BLACK	13
S5 — SBR-COLOR	14
S5 — SBR-BLACK	15
S4 — SBR-COLOR	16
S4 — SBR-BLACK	17
S2 — SBR-COLOR	18
S2 — SBR-BLACK	19
S1 — SBR-COLOR	20
S1 — SBR-BLACK	21
S8 — NBR72	22
S8 — NBR45	24
S8 — EPDM96	26
S8 — EPDM95	27
S8 — EPDM15	28
S8 — SBR+ Flame retardant	29
S7 — NBR72	30
S7 — NBR45	32
S7 — EPDM96	34
S7 — EPDM95	35
S7 — EPDM15	36
S6 — NBR72	37
S6 — NBR45	39
S6 — EPDM96	41
S6 — EPDM95	42
S6 — EPDM15	43
S5 — NBR72	44
S5 — NBR45	46
S5 — EPDM96	48
S5 — EPDM95	49
S5 — EPDM15	50
S4 — NBR72	51
S4 — NBR45	53
S4 — EPDM96	55
S4 — EPDM95	56
S4 — EPDM15	57
S2 — NBR72	58
S2 — NBR45	60
S2 — EPDM96	62
S2 — EPDM95	63
S2 — EPDM15	64
S1 — NBR72	65
S1 — NBR45	67
S1 — EPDM96	69
S1 — EPDM95	70
S1 — EPDM15	71


RUBBER FLOORING COIN PATTERN — S8-CB



EXTERIOR	-40 - +120	°C	65 +/- 5	Sh A	12	MPa	4	mm	4.3	kg/m ²
ENVIRONMENT	TEMPERATURE RANGE		HARDNESS		TENSILE STRENGTH		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

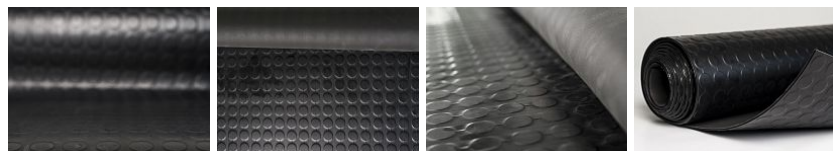

ADDITIONAL INFORMATION

Polymer content: 58 % EPDM, 19 % NR, 23 % SBR

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.2 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1230 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING WIDE RIBBED PATTERN — S4-SBR76



INTERIOR	80 +/- 5	Sh A	5-6	mm	5.9-7.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

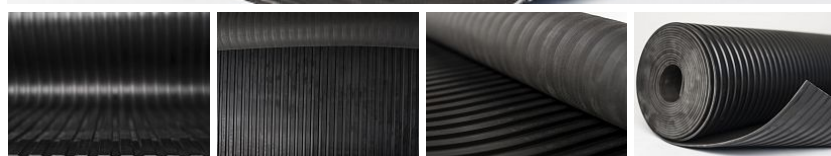

RESISTANCE

Abrasion resistance **HIGHLY RESISTANT**Weather resistance **NO**Ozone resistance **NO**UV resistance **NO**Alkaline resistance **NO**Acid resistance **NO**Oil resistance **NO**Gasoline resistance **NO**

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a wide ribbed type S4, in black color. In standard thickness 6 mm. It weighs 6.3 kg / m².

CONFIGURATION OPTIONS

THICKNESS

5 mm (+/- 0,5 mm)

6 mm (+/- 0,5 mm)

WIDTH

1230 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

S4 — SBR+ Flame
retardant


RUBBER FLOORING WIDE RIBBED PATTERN — S4-N



INTERIOR	80 +/- 5	Sh A	6	mm	5.9	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

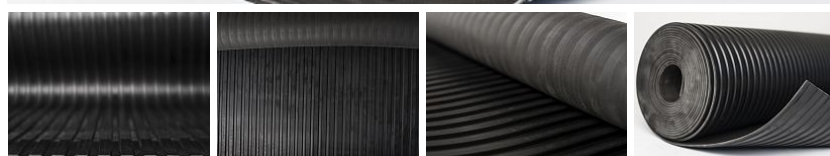

RESISTANCE

Flame retardant	YES
Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a wide ribbed type S4, in black color. This flooring is flame retardant according to EN 13501 C_{fl}-s1. In standard thickness 6 mm. It weighs 5.9 kg / m². Specify in the configurator.

This classification is valid for the following end use conditions: - Flooring laid on the any substrates of reaction to fire class A_{1fl} or A_{2fl}.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1230 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RUBBER PADDING FINEE RIBBED — S3-SBR




INTERIOR
ENVIRONMENT


Sh A
HARDNESS

mm
THICKNESS

kg/m²
BASIS WEIGHT

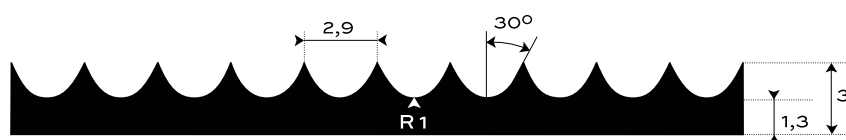

Bottom side - cloth impression

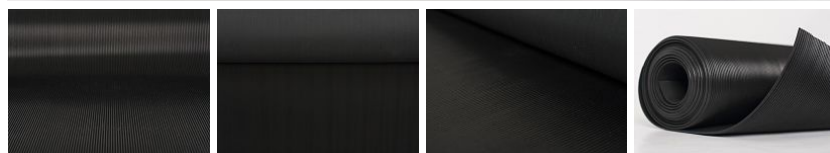

ADDITIONAL INFORMATION

Custom cuts available.

Rubber pad for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S3 type, in the basic design in four colors: black, gray, blue and green. In standard thickness 3 mm. It weighs 3.3 kg / m².

Pad for non-aggressive interior environment. The hardness of the standard version is 65 ShA, which means higher formability and easier handling at different surfaces.


Made of SBR and NR rubber compounds. Specify in the configurator.

CONFIGURATION OPTIONS


RUBBER FLOORING COIN PATTERN — S8-SBR-COLOR



INTERIOR	80 +/- 5	Sh A	4-10	mm	5.7-16.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

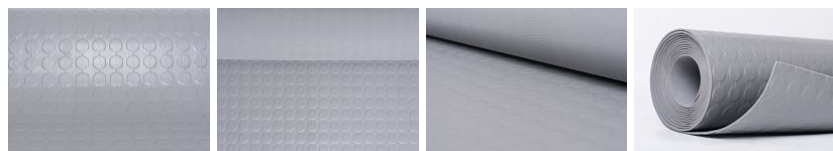

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT
	-

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a coin pattern type S8, in the basic design in six colors: gray, dark gray, blue, green, red and yellow. In standard thickness 4 mm. It weighs 5.7 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH

1230 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING COIN PATTERN — S8 - SBR-BLK



INTERIOR	80 +/- 5 Sh A	4-12 mm	6-19.9 kg/m²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT



Bottom side - cloth impression

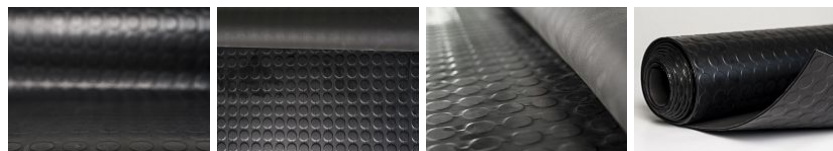

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Abrasion resistance **HIGHLY RESISTANT**
 Weather resistance **NO**
 Ozone resistance **NO**
 UV resistance **NO**
 Alkaline resistance **NO**
 Acid resistance **NO**
 Oil resistance **NO**
 Gasoline resistance **NO**

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a coin pattern type S8, in the basic design in black. In standard thickness 4 mm. It weighs 5.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)
12 mm	(+/- 1,0 mm)

WIDTH

1230 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING FINE RIBBED — S7- SBR-COLOR



INTERIOR	80 +/- 5	Sh A	3	mm	3.3-3.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

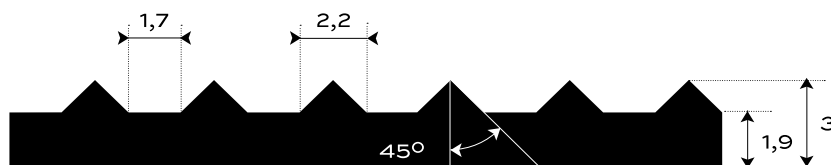

Bottom side - cloth impression

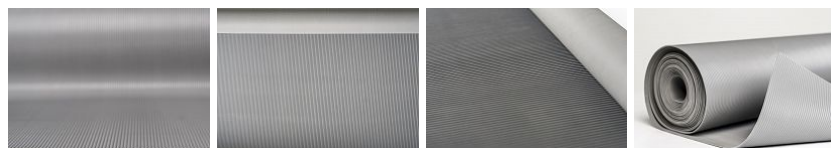

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S7 type, in the basic design in three colors: gray, blue and green. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED — S7-SBR-STD



INTERIOR	80 +/- 5	Sh A	3	mm	3.3	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

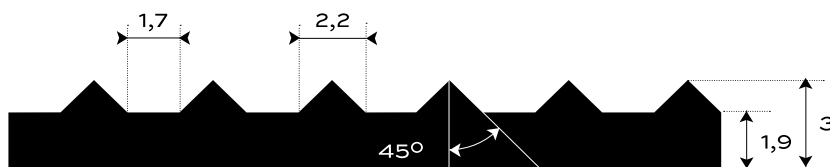

Bottom side - cloth impression

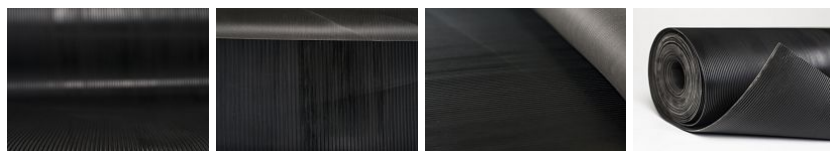

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S7 type, in the basic design in black color. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING WIDE RIBBED — S6-SBR-COLOR



INTERIOR	80 +/- 5	Sh A	3.5	mm	3.5-3.9	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

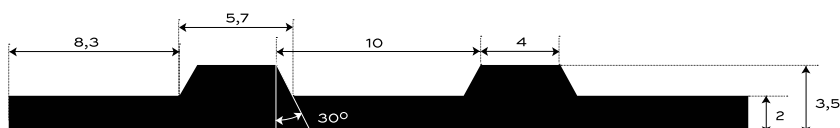

Bottom side - cloth impression

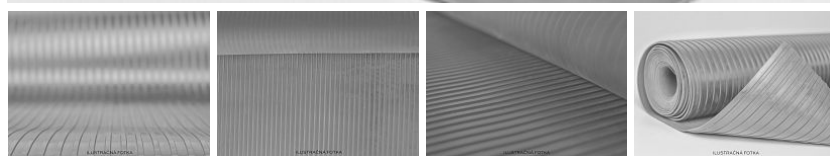

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance NO
Ozone resistance NO
UV resistance NO
Alkaline resistance NO
Acid resistance NO
Oil resistance NO
Gasoline resistance NO

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide grooved design of the S6 type, in the basic design in three colors: gray, blue and green. In standard thickness 3.5 mm. It weighs 3.9 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

S6 — SBR-BLACK


RUBBER FLOORING WIDE RIBBED — S6-SBR-STD



INTERIOR ENVIRONMENT	80 +/- 5 HARDNESS	Sh A	3.5 THICKNESS	mm	4.1 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	------------------	----	---------------------	-------------------



Bottom side - cloth impression

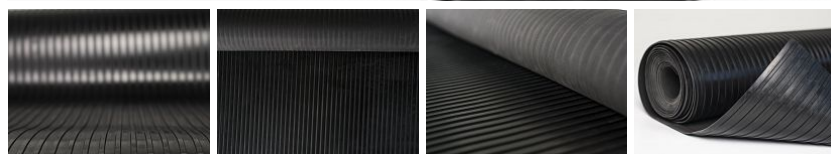

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, in the basic design in black color. In standard thickness 3.5 mm. It weighs 3.9 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED — S5-SBR-COLOR



INTERIOR	80 +/- 5	Sh A	3	mm	4.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

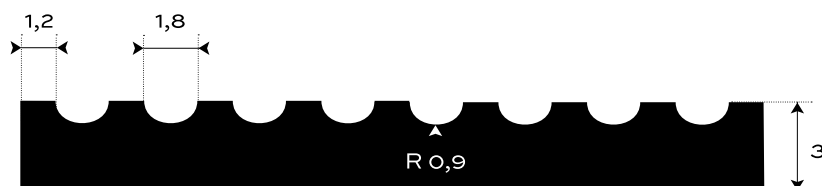

Bottom side - cloth impression

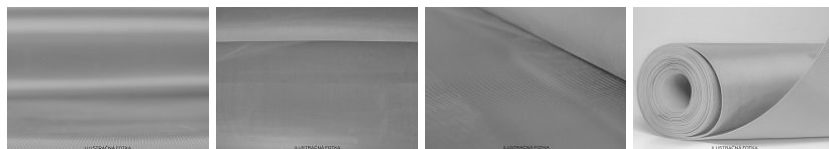

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S5 type, in the basic design in three colors: gray, blue and green. In standard thickness 3 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED — S5-SBR-STD



INTERIOR ENVIRONMENT	80 +/- 5 HARDNESS	Sh A	3 THICKNESS	mm	4.2 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

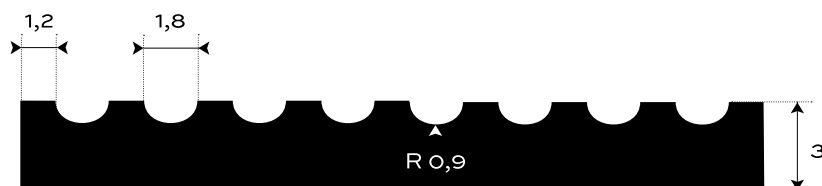

Bottom side - cloth impression

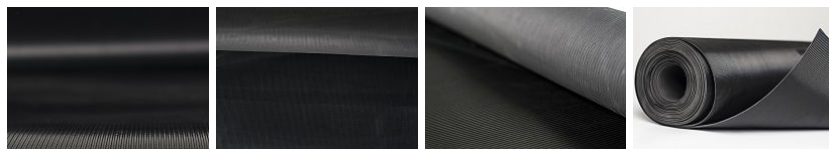

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, in the basic design in black color. In standard thickness 3 mm. It weighs 4.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


S4 — SBR-COLOR

RUBBER FLOORING WIDE RIBBED — S4-
SBR-COLOR

INTERIOR	80 +/- 5	Sh A	6	mm	8	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

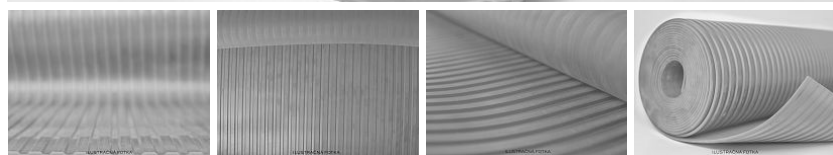

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved design of the S4 type, in the basic design in three colors: gray, blue and green. In standard thickness 6 mm. It weighs 8 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

S4 — SBR-BLACK


RUBBER FLOORING WIDE RIBBED — S4-SBR-STD



INTERIOR	80 +/- 5	Sh A	6	mm	7.4	kg/m ²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT			



Bottom side - cloth impression

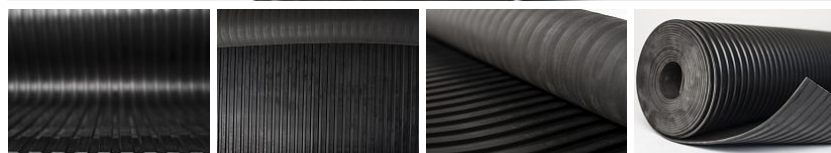

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance NO
Ozone resistance NO
UV resistance NO
Alkaline resistance NO
Acid resistance NO
Oil resistance NO
Gasoline resistance NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, in the basic design in black color. In standard thickness 6 mm. It weighs 8 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED — S2-SBR-COLOR



INTERIOR	80 +/- 5	Sh A	3	mm	3.9-4.1	kg/m ²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

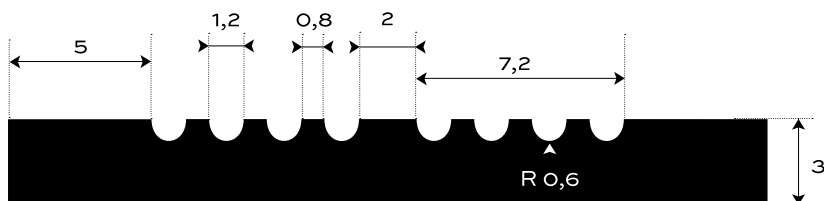

Bottom side - cloth impression

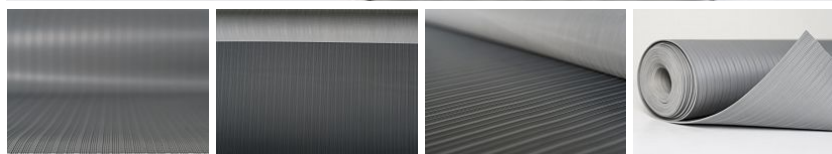

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S2 type, in the basic design in three colors: gray, blue and green. In standard thickness 3 mm. It weighs 4.1 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED — S2-SBR-STD



INTERIOR ENVIRONMENT	80 +/- 5 HARDNESS	Sh A	3 THICKNESS	mm	4.2 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

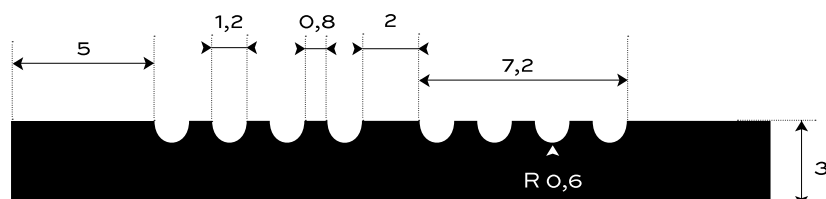

Bottom side - cloth impression

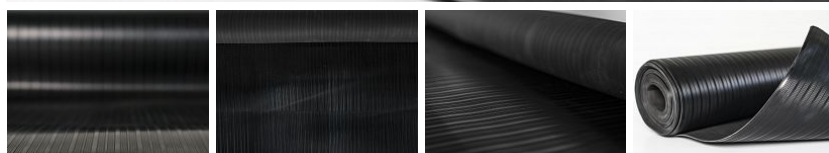

ADDITIONAL INFORMATION

Temperature range -25/+80 °C.

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved design of the S2 type, in the basic design in black. In standard thickness 3 mm. It weighs 4.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING WIDE RIBBED — S1- SBR-COLOR



INTERIOR	80 +/- 5	Sh A	4	mm	4.5-4.8	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

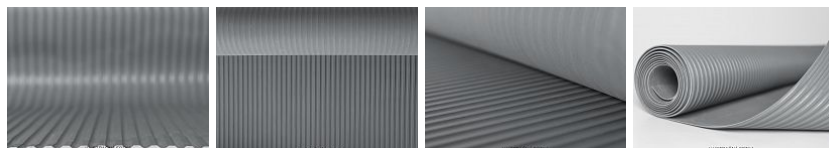

ADDITIONAL INFORMATION

Temperature range -25/+80 °C

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved design of the S1 type, in the basic design in three colors: gray, blue and green. In standard thickness of 4 mm. It weighs 4.8 kg / m². Finish your specification in configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING WIDE RIBBED — S1-SBR-STD



INTERIOR ENVIRONMENT	80 +/- 5 HARDNESS	Sh A	4 THICKNESS	mm	4.7 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

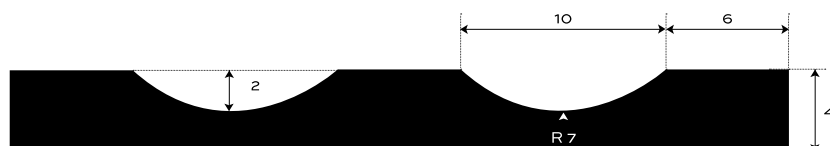

Bottom side - cloth impression

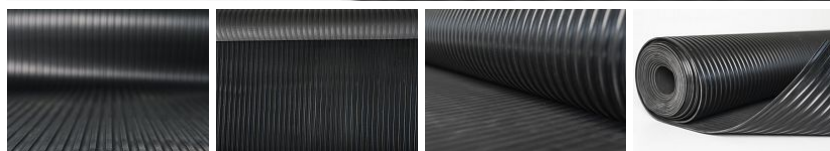

ADDITIONAL INFORMATION

Temperature range -25/+80 °C

RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S1, in the basic design in black. In standard thickness 4 mm. It weighs 4.8 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR72



INTERIOR	70 +/- 5	Sh A	4-10	mm	5.2-13.1	kg/m ²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT			



Bottom side - cloth impression

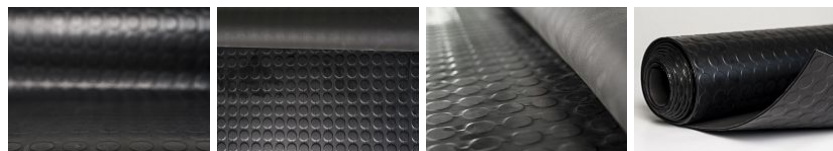

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With coin pattern (round stud) type S8, oil-resistant in black. In standard thickness 4 mm. It weighs 5.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

5 mm (+/- 0,5 mm)

6 mm (+/- 0,5 mm)

8 mm (+/- 0,6 mm)

10 mm (+/- 0,6 mm)

WIDTH


1230 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR72


7672 SWELLING RATES

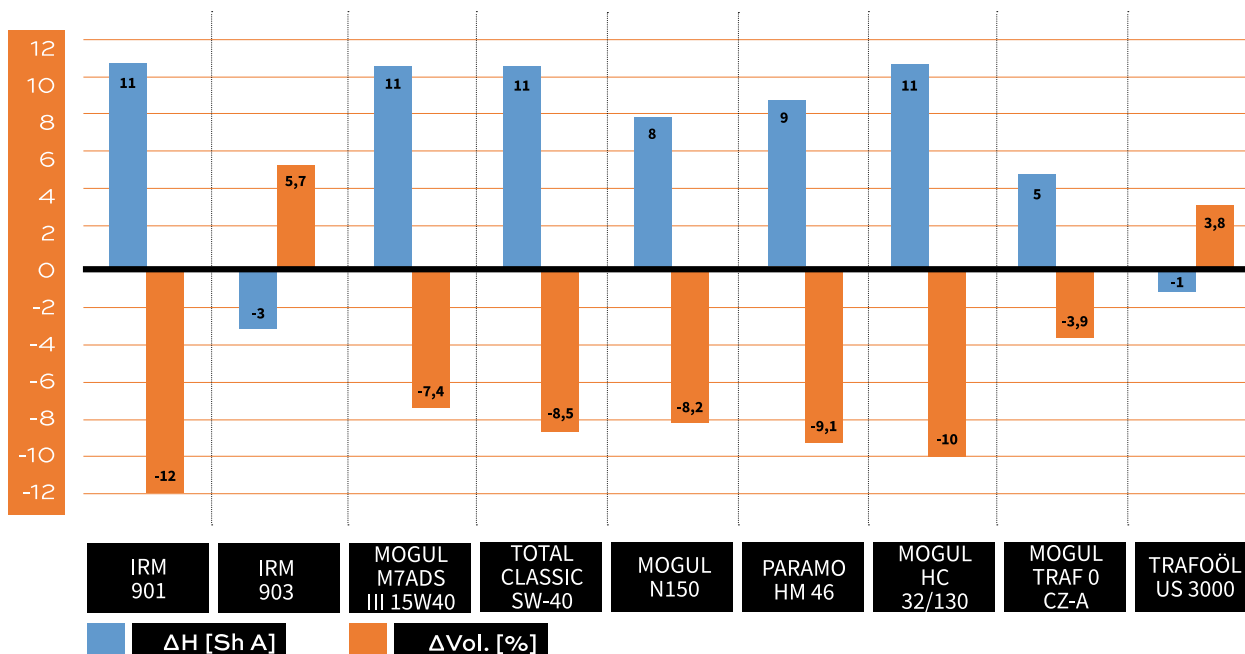


RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR45



INTERIOR	65 +/- 5	Sh A	4-10	mm	6.3-16.9	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

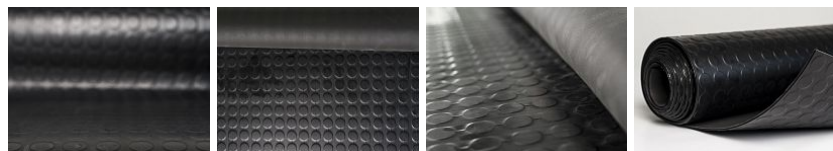

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. With coin pattern (round stud) type S8, oil-resistant in black. In standard thickness 4 mm. It weighs 6.6 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

WIDTH


1230 mm	(+/- 10 mm)
---------	-------------

LENGTH

10 m	(+/- 200 mm)
------	--------------

RUBBER FLOORING COIN PATTERN OIL-
RESISTANT - S8-NBR45


7645 SWELLING RATES

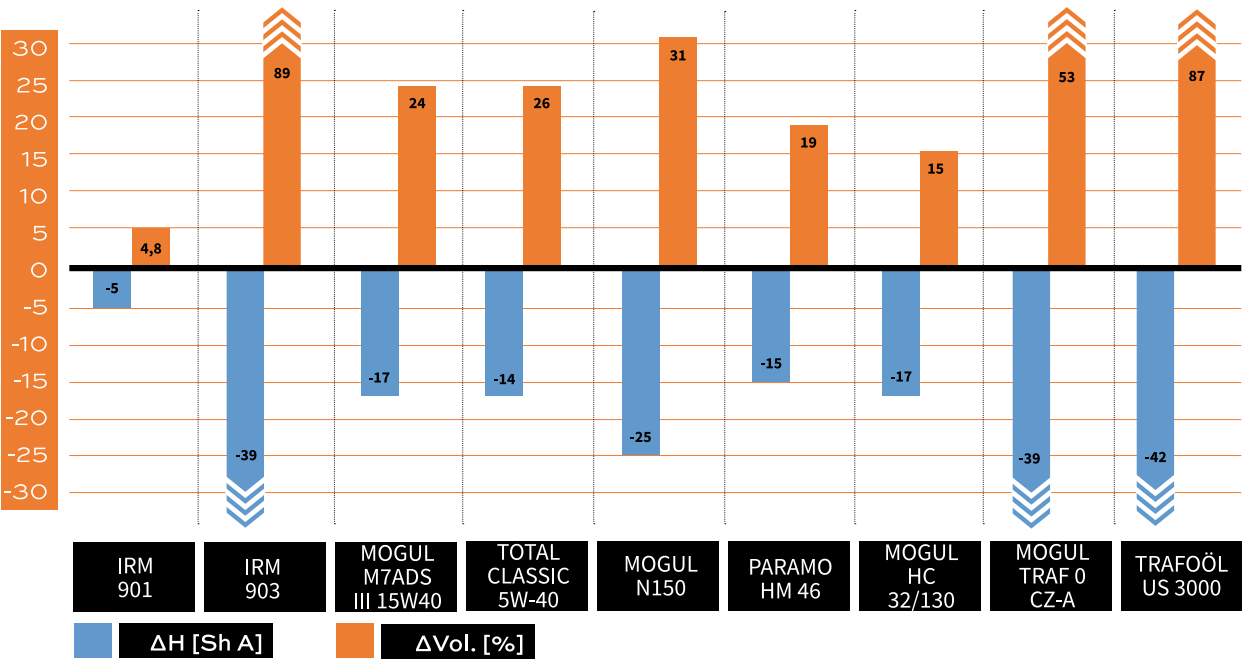


RUBBER FLOORING COIN PATTERN — S8-EPDM96



EXTERIOR	80 +/- 5	Sh A	4-10	mm	5.2-12.9	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

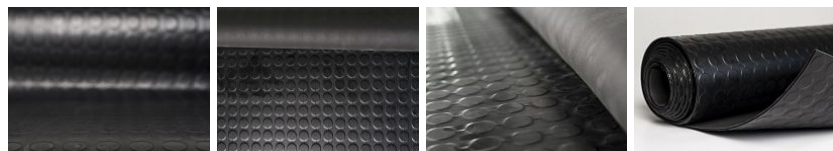

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.9 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

5 mm (+/- 0,5 mm)

6 mm (+/- 0,5 mm)

8 mm (+/- 0,6 mm)

10 mm (+/- 0,6 mm)

WIDTH

1230 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING COIN PATTERN — S8-EPDM95



EXTERIOR	70 +/- 5	Sh A	4	mm	5.2	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

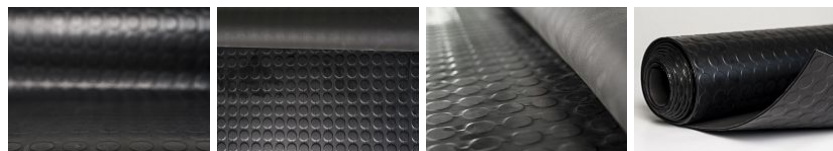

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.9 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1230 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING COIN PATTERN — S8-EPDM15



EXTERIOR	60 +/- 5	Sh A	4	mm	5	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

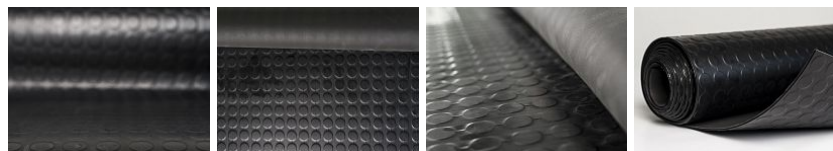

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, heat-resistant in black color. In standard thickness 4 mm. It weighs 4.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH


1230 mm (+/- 10 mm)

LENGTH


10 m (+/- 200 mm)

S8 — SBR+ Flame
retardantRUBBER FLOORING COIN PATTERN — S8-
N

INTERIOR	80 +/- 5	Sh A	4	mm	5.9	kg/m ²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT			



Bottom side - cloth impression

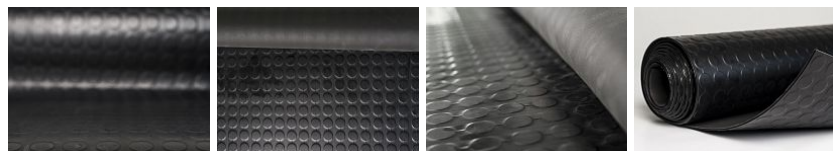

RESISTANCE

Flame retardant	YES
Abrasion resistance	HIGHLY RESISTANT
Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO
Mechanical puncture resistance	YES
Test for slip resistance	YES
Dielectric tests according given class	YES
Ageing tests	YES
Low temperature folding test	YES
Flame retardance test	YES
Oil resistance	YES
Acid resistance	YES

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. With a coin pattern (round stud) type S8, in black color. This flooring is flame retardant according to EN 13501 C_{fl}-s1. In standard thickness 4 mm. It weighs 5.9 kg / m². Specify in the configurator.

This classification is valid for the following end use conditions: - Flooring laid on the any substrates of reaction to fire class A1_{fl} or A2_{fl}.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1230 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S7-NBR72



INTERIOR	70 +/- 5	Sh A	3	mm	2.9	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

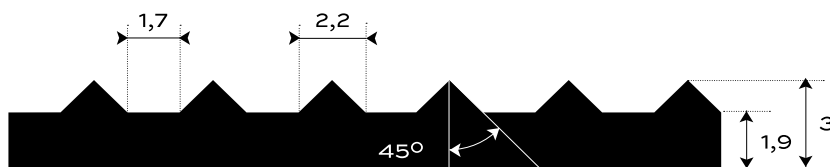

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a fine grooved design type S7, oil-resistant in black color. In standard thickness 3 mm. It weighs 2.7 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)


1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING FINE RIBBED OIL-
RESISTANT - S7-NBR72


7672 SWELLING RATES

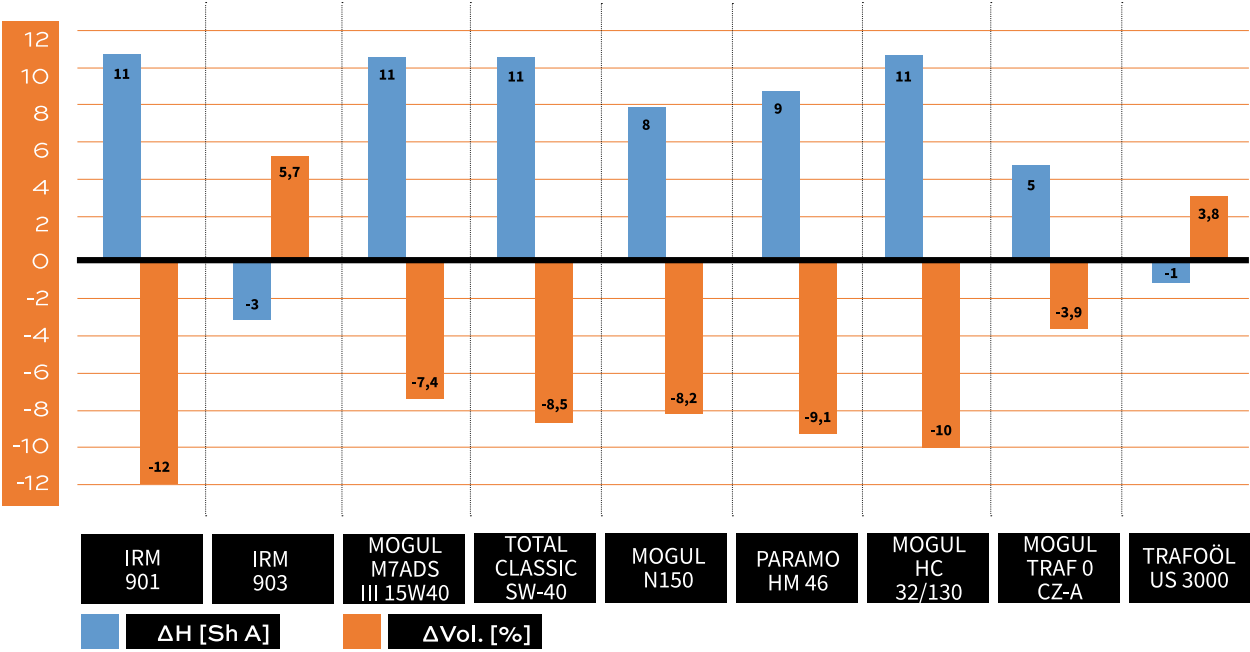

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S7-NBR45



INTERIOR	65 +/- 5	Sh A	3	mm	3.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

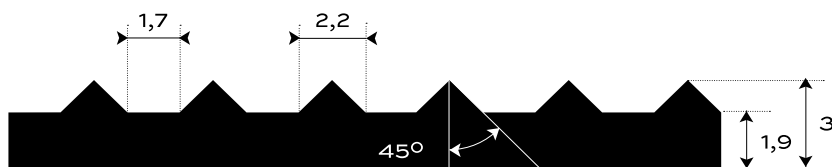

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a fine grooved design type S7, oil-resistant in black. In standard thickness 3 mm. It weighs 3.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------

S7— NBR45

RUBBER FLOORING FINE RIBBED OIL-
RESISTANT - S7-NBR45


7645 SWELLING RATES

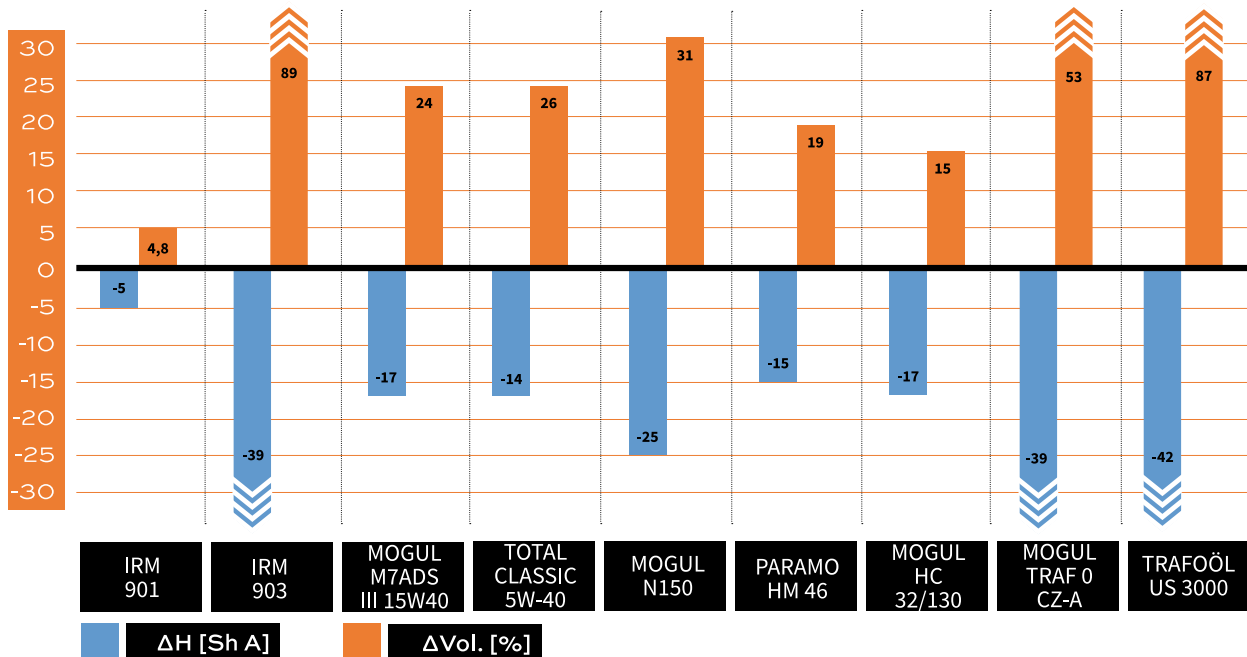


RUBBER FLOORING FINE RIBBED — S7-EPDM96



EXTERIOR	80 +/- 5	Sh A	3	mm	2.9	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

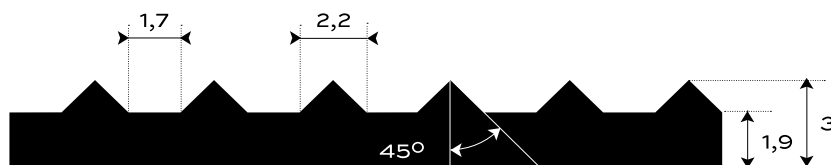

Bottom side - cloth impression

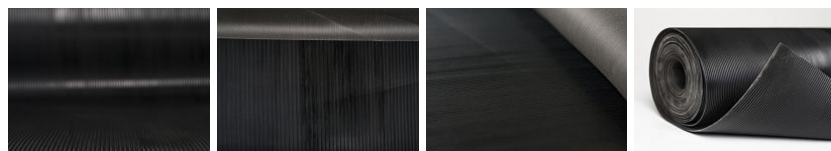

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber flooring for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a finely grooved design type S7, heat-resistant in black. In standard thickness 3 mm. It weighs 2.7 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1000 mm	(+/- 10 mm)
---------	-------------

1200 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING FINE RIBBED — S7-EPDM95



EXTERIOR	70 +/- 5	Sh A	3	mm	2.9	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

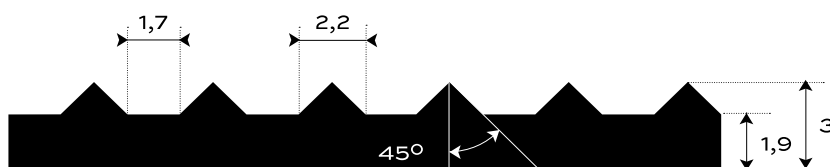

Bottom side - cloth impression

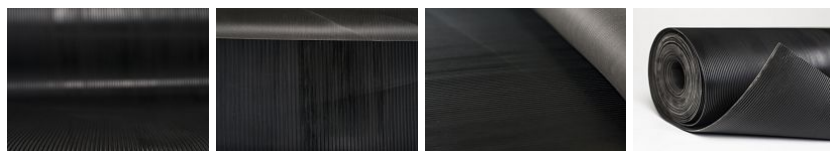

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber flooring for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a finely grooved design type S7, heat-resistant in black. In standard thickness 3 mm. It weighs 2.7 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------

RUBBER FLOORING FINE RIBBED — S7-EPDM15



EXTERIOR	60 +/- 5	Sh A	3	mm	2.8	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

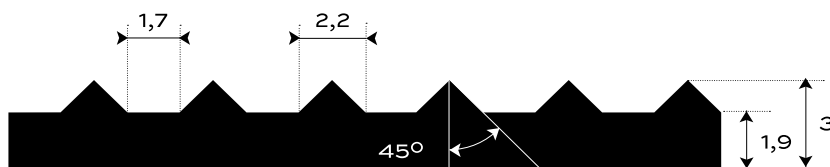

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber flooring for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a finely grooved design type S7, heat-resistant in black. In standard thickness 3 mm. It weighs 2.7 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR72



INTERIOR	70 +/- 5	Sh A	3.5	mm	3.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

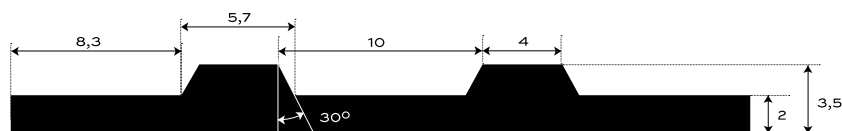

Bottom side - cloth impression

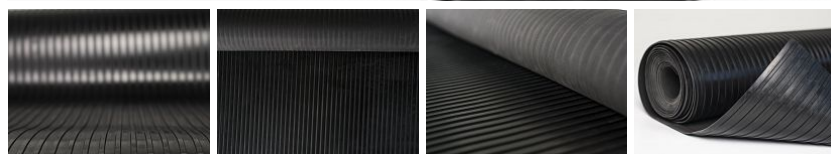

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide grooved pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 3.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)


1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING WIDE RIBBED OIL-
RESISTANT - S6-NBR72


7672 SWELLING RATES

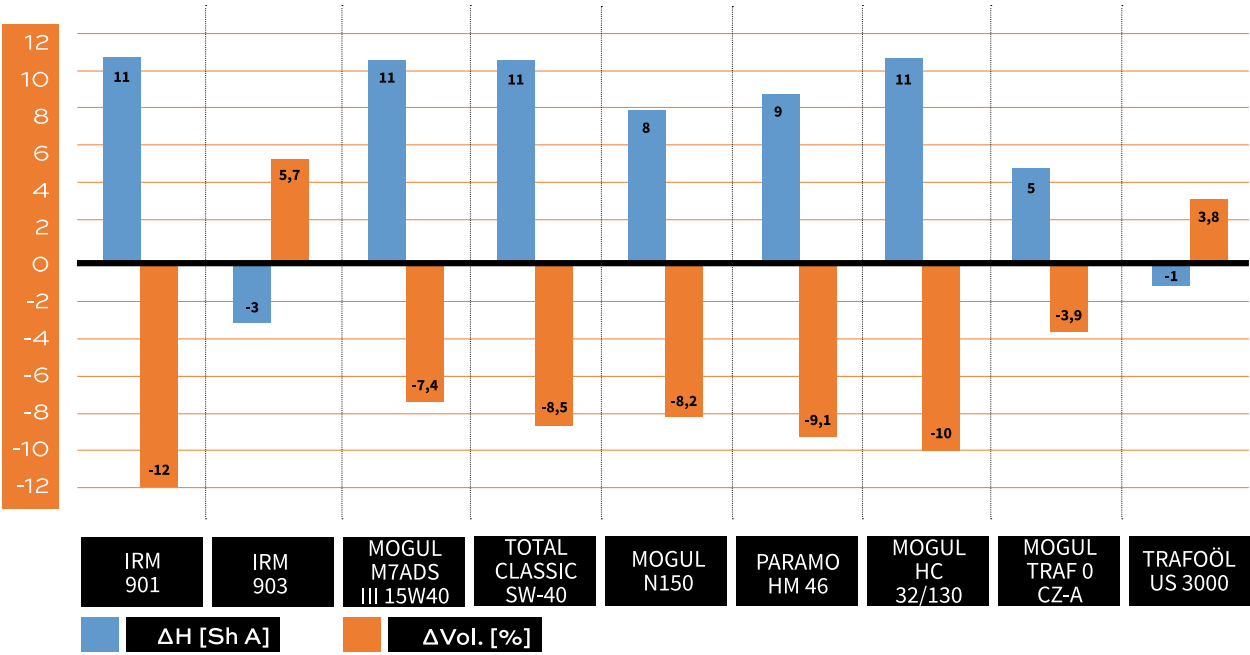


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR45



INTERIOR	65 +/- 5	Sh A	3.5	mm	4.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

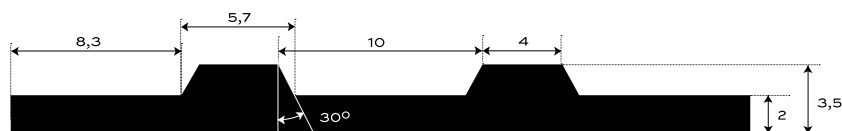

Bottom side - cloth impression

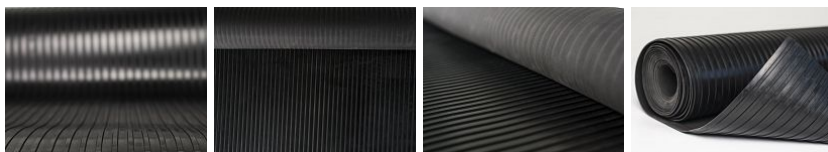

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S6, oil-resistant in black color. In standard thickness 3.5 mm. It weighs 4.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

S6 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S6-NBR45


7645 SWELLING RATES

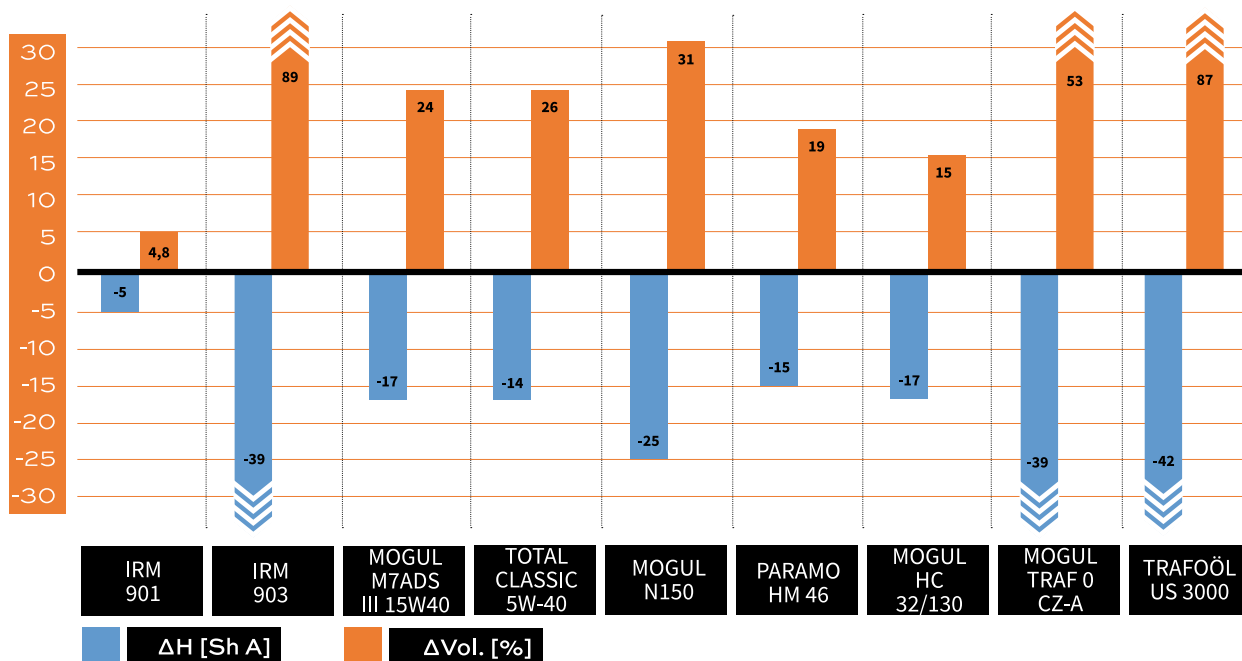


RUBBER FLOORING WIDE RIBBED — S6-EPDM96



EXTERIOR	80 +/- 5	Sh A	3.5	mm	3.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

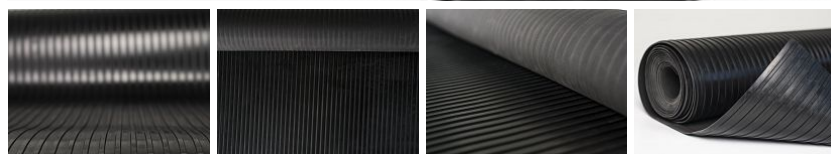

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, heat-resistant in black color. In standard thickness 3.5 mm. It weighs 3 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


GUMOVÁ DEZÉNOVÁ DLÁŽKOVINA ŠIROKO RYHOVANÁ — S6-EPDM95



EXTERIOR	70 +/- 5	Sh A	3.5	mm	3.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

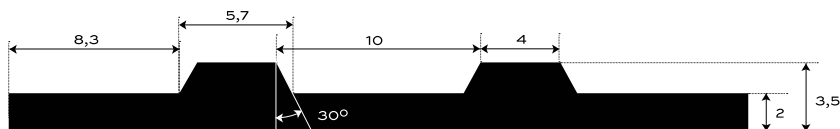

Bottom side - cloth impression

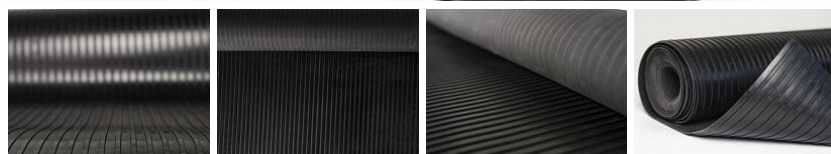

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, heat-resistant in black color. In standard thickness 3.5 mm. It weighs 3 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING WIDE RIBBED — S6-EPDM15



EXTERIOR	60 +/- 5	Sh A	3.5	mm	3	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

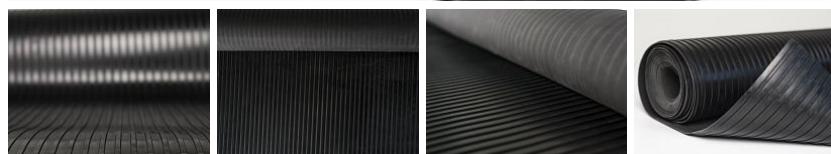

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S6, heat-resistant in black color. In standard thickness 3.5 mm. It weighs 2.9 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3.5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR72



INTERIOR	70 +/- 5	Sh A	3	mm	3.5	kg/m ²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT			

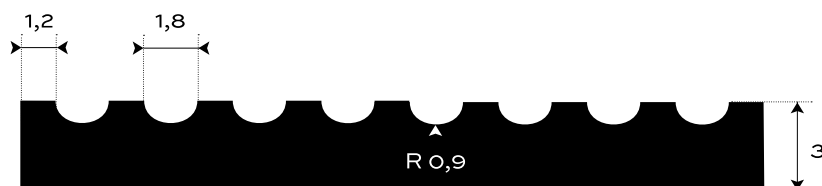

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a fine ribbed pattern type S5, oil-resistant in black color. In standard thickness 3 mm. It weighs 3.5 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)


1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR72


7672 SWELLING RATES

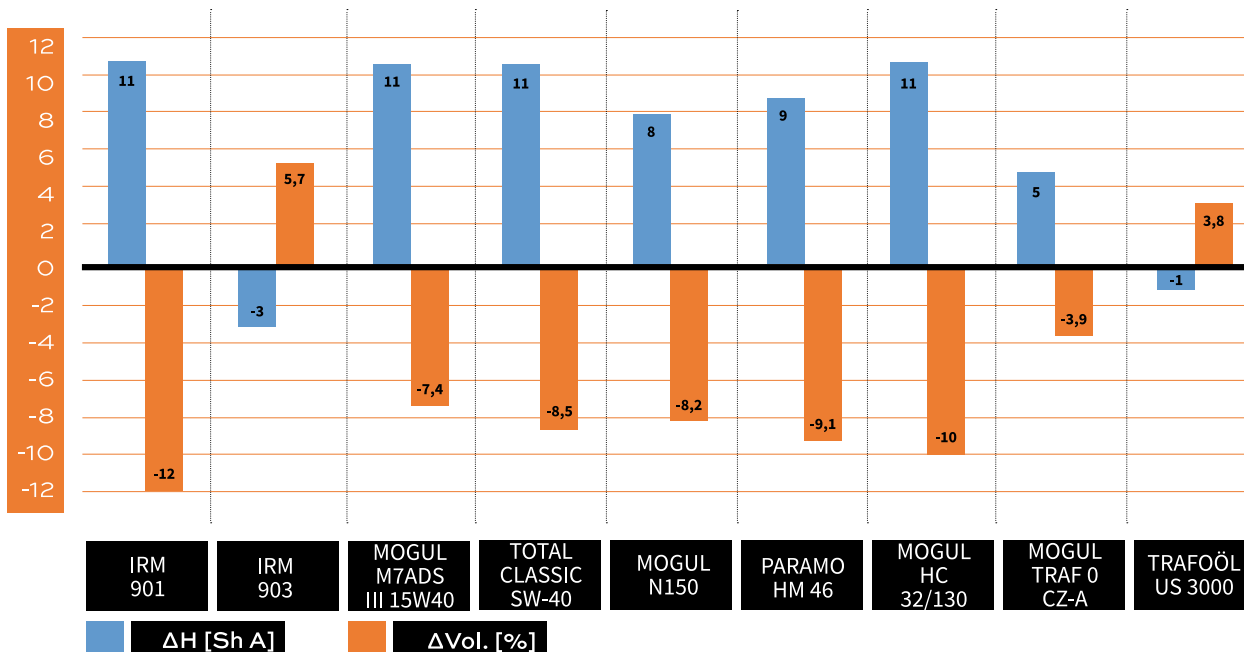

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S5-NBR45



INTERIOR ENVIRONMENT	65 +/- 5 HARDNESS	Sh A	3 THICKNESS	mm	4.6 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

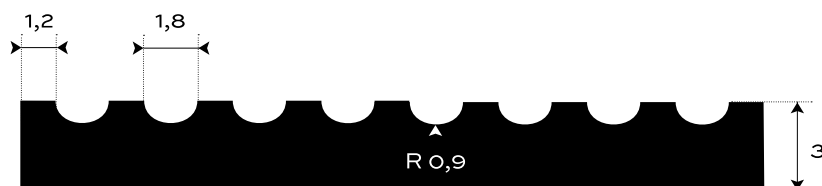

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. In a fine ribbed pattern type S5, oil-resistant in black color. In standard thickness 3 mm. It weighs 4.6 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------


1000 mm	(+/- 10 mm)
---------	-------------

LENGTH

10 m	(+/- 200 mm)
------	--------------

RUBBER FLOORING FINE RIBBED OIL-
RESISTANT - S5-NBR45


7645 SWELLING RATES

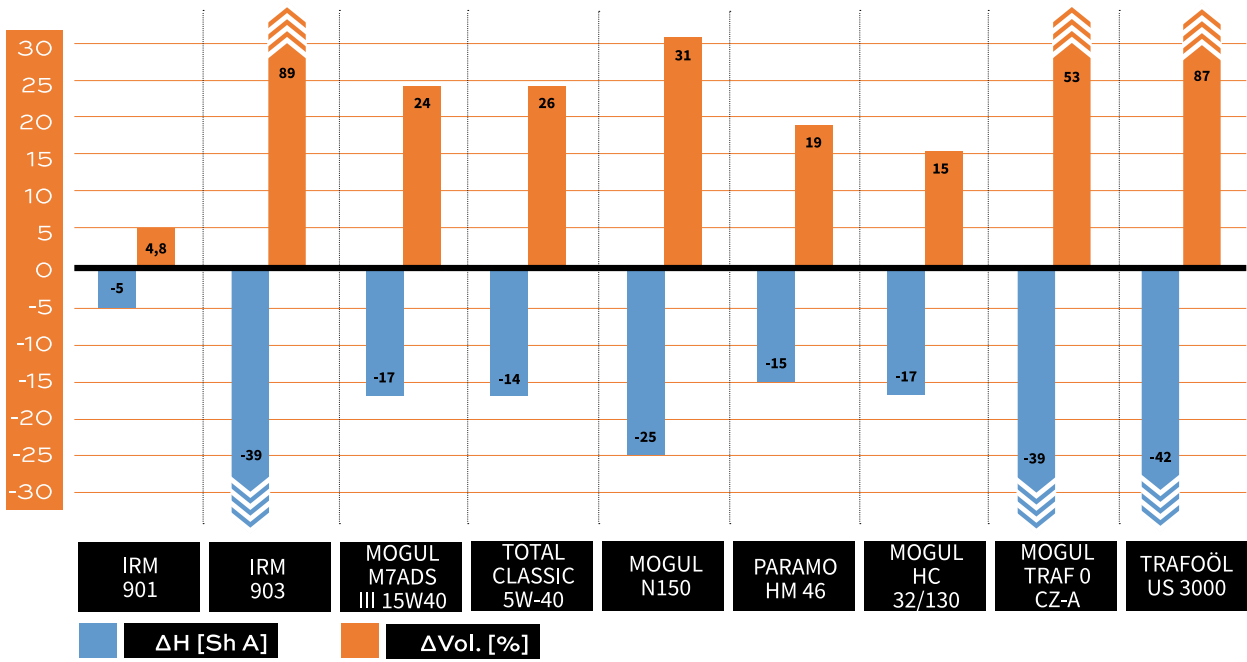


RUBBER FLOORING FINE RIBBED — S5-EPDM96



EXTERIOR	80 +/- 5	Sh A	3	mm	3.5	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

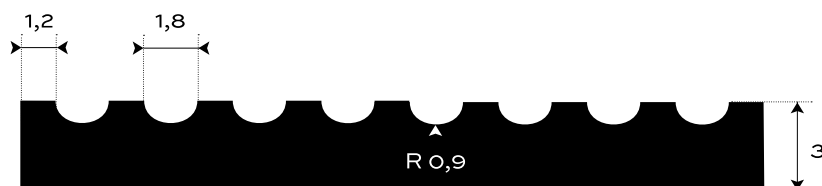

Bottom side - cloth impression

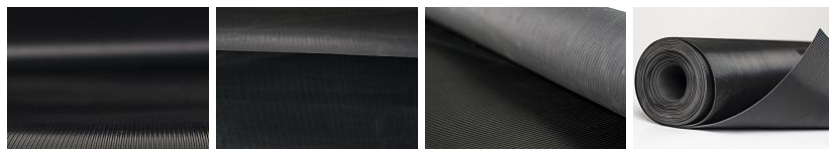

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING FINE RIBBED — S5-EPDM95



EXTERIOR	70 +/- 5	Sh A	0	MPa	3	mm	3.5	kg/m²
ENVIRONMENT	HARDNESS	TENSILE STRENGTH	THICKNESS	BASIS WEIGHT				

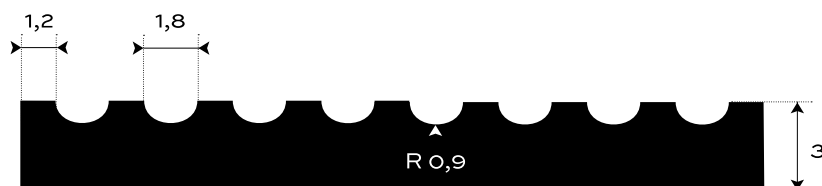

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING FINE RIBBED — S5-EPDM15



EXTERIOR	60 +/- 5	Sh A	3	mm	3.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

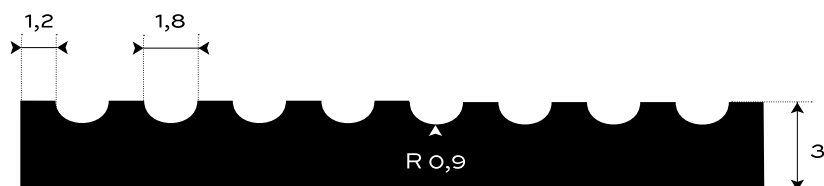

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a fine grooved design of the S5 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR72



INTERIOR	70 +/- 5	Sh A	6	mm	6.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

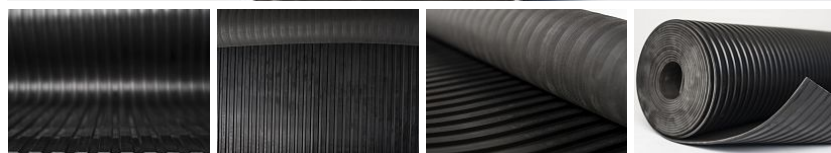

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern type S4, oil-resistant in black color. In standard thickness 6 mm. It weighs 6.2 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

S4 — NBR72

RUBBER FLOORING WIDE RIBBED OIL-
RESISTANT - S4-NBR72


7672 SWELLING RATES

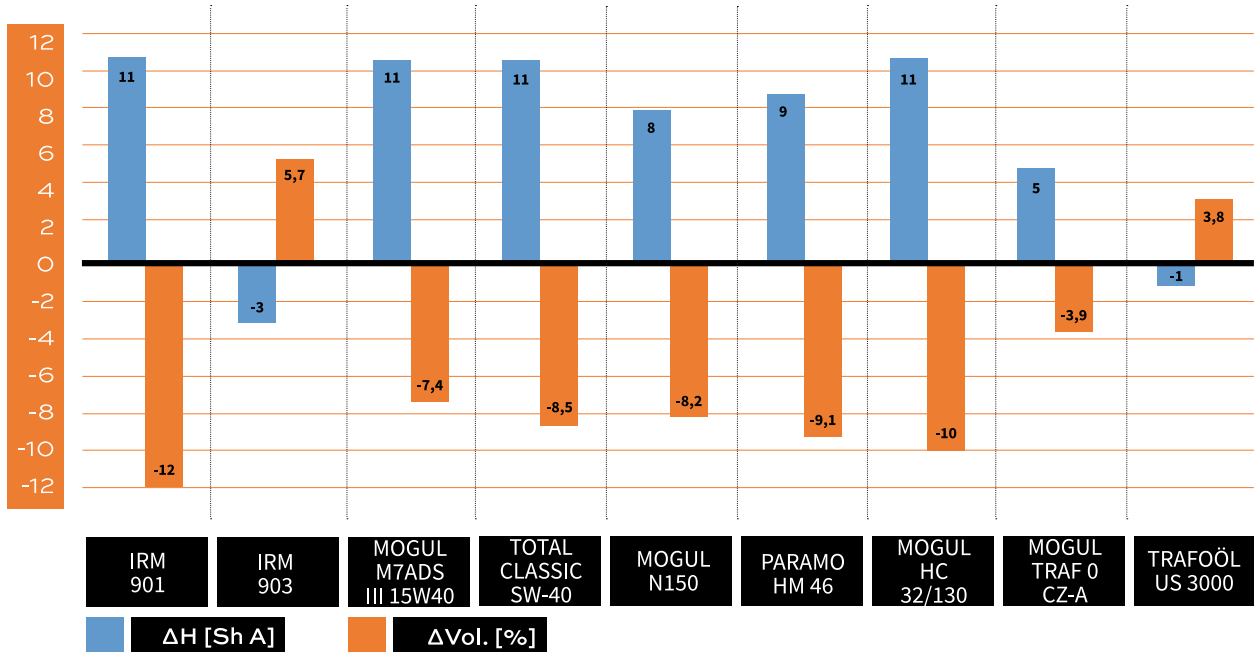


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S4-NBR45



INTERIOR	65 +/- 5	Sh A	6	mm	8.2	kg/m ²
ENVIRONMENT	HARDNESS	THICKNESS	BASIS WEIGHT			



Bottom side - cloth impression

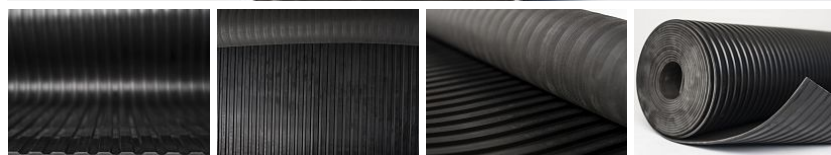

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern type S4, oil-resistant in black color. In standard thickness 6 mm. It weighs 8.2 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

S4 — NBR45

RUBBER FLOORING WIDE RIBBED OIL-
RESISTANT - S4-NBR45


7645 SWELLING RATES

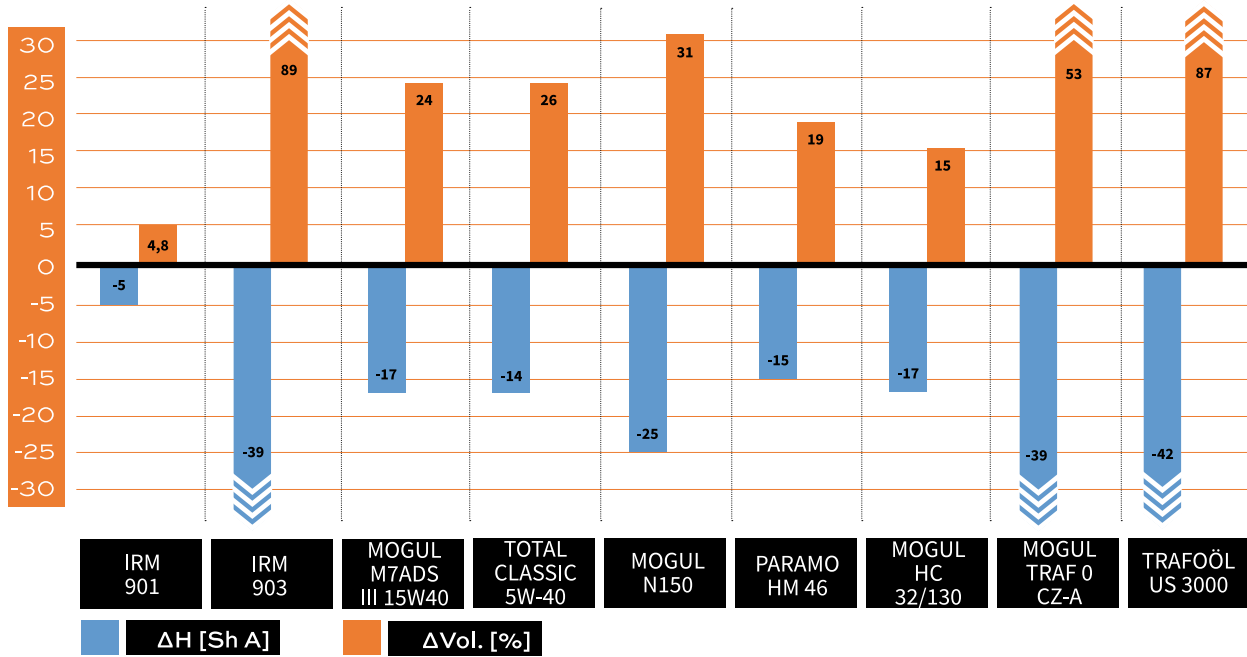


RUBBER FLOORING WIDE RIBBED — S4-EPDM96



EXTERIOR	80 +/- 5	Sh A	6	mm	6.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

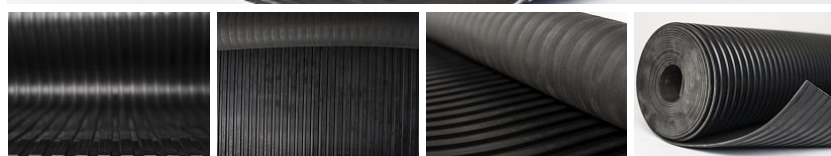

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.2 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1000 mm (+/- 10 mm)

1200 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING WIDE RIBBED — S4-EPDM95



EXTERIOR	70 +/- 5	Sh A	6	mm	6.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

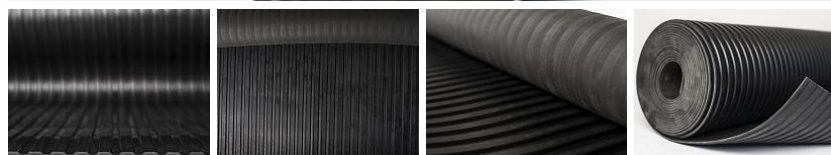

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.2 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING WIDE RIBBED — S4-EPDM15



EXTERIOR	60 +/- 5	Sh A	6	mm	6.1	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	



Bottom side - cloth impression

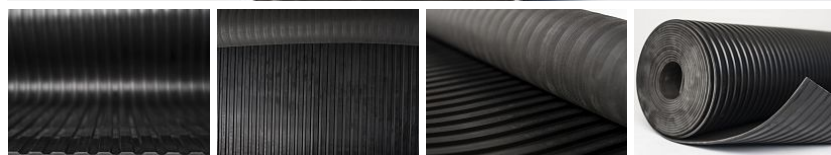

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a wide ribbed pattern type S4, heat-resistant in black color. In standard thickness 6 mm. It weighs 6.1 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

6 mm (+/- 0,5 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR72



INTERIOR ENVIRONMENT	70 +/- 5 HARDNESS	Sh A	3 THICKNESS	mm	3.5 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

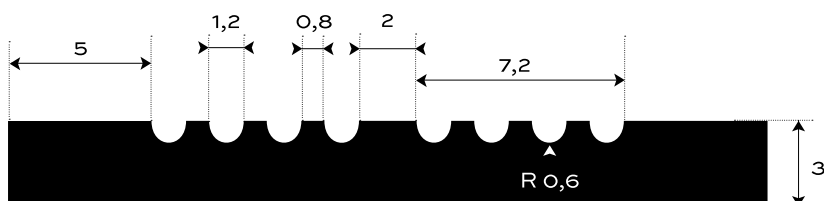

Bottom side - cloth impression

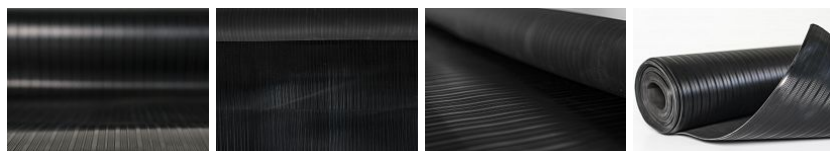

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, oil-resistant in black color. In standard thickness 3 mm. It weighs 3.5 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)


1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)

RUBBER FLOORING FINE RIBBED OIL- RESISTANT - S2-NBR72


7672 SWELLING RATES

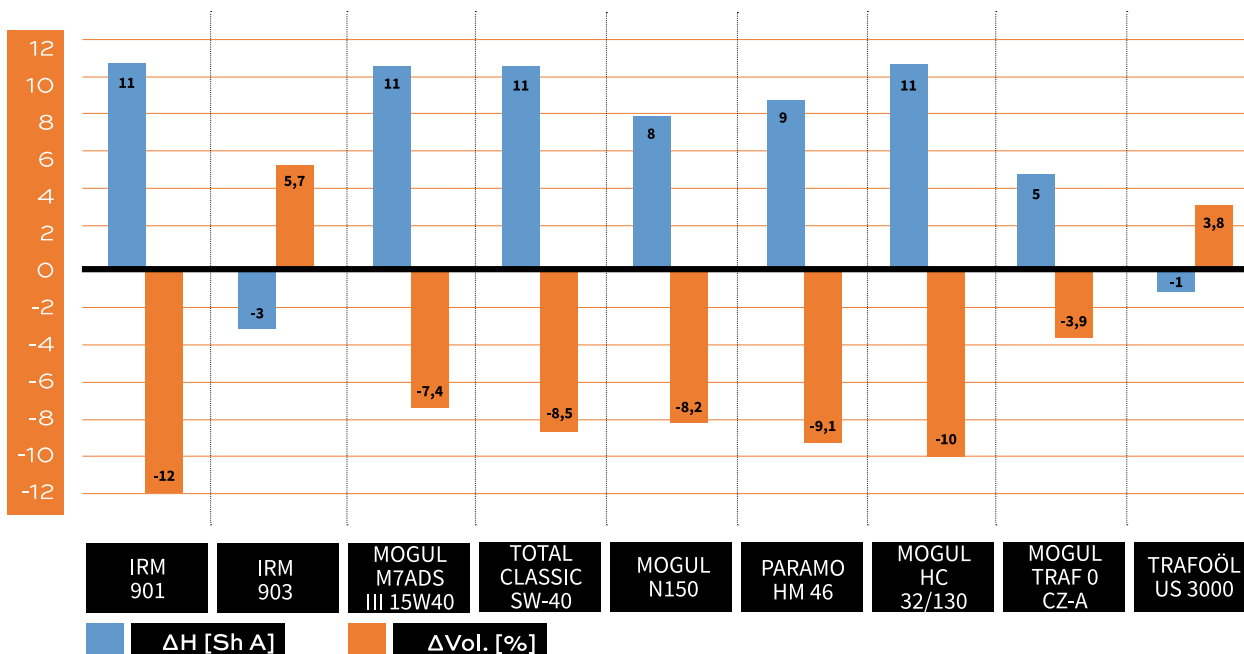


RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45



INTERIOR ENVIRONMENT	65 +/- 5 HARDNESS	Sh A	3 THICKNESS	mm	4.6 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------

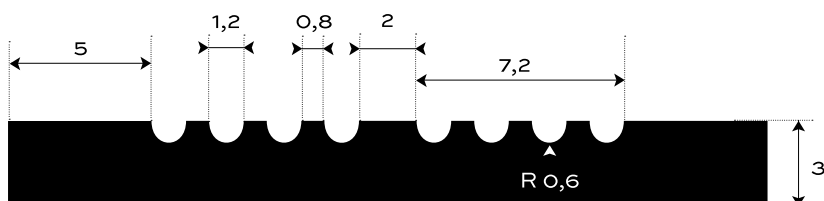

Bottom side - cloth impression

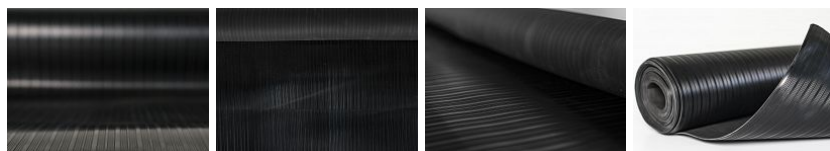

ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, oil-resistant in black color. In standard thickness 3 mm. It weighs 4.6 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------


1000 mm	(+/- 10 mm)
---------	-------------

LENGTH

10 m	(+/- 200 mm)
------	--------------

RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45


7645 SWELLING RATES

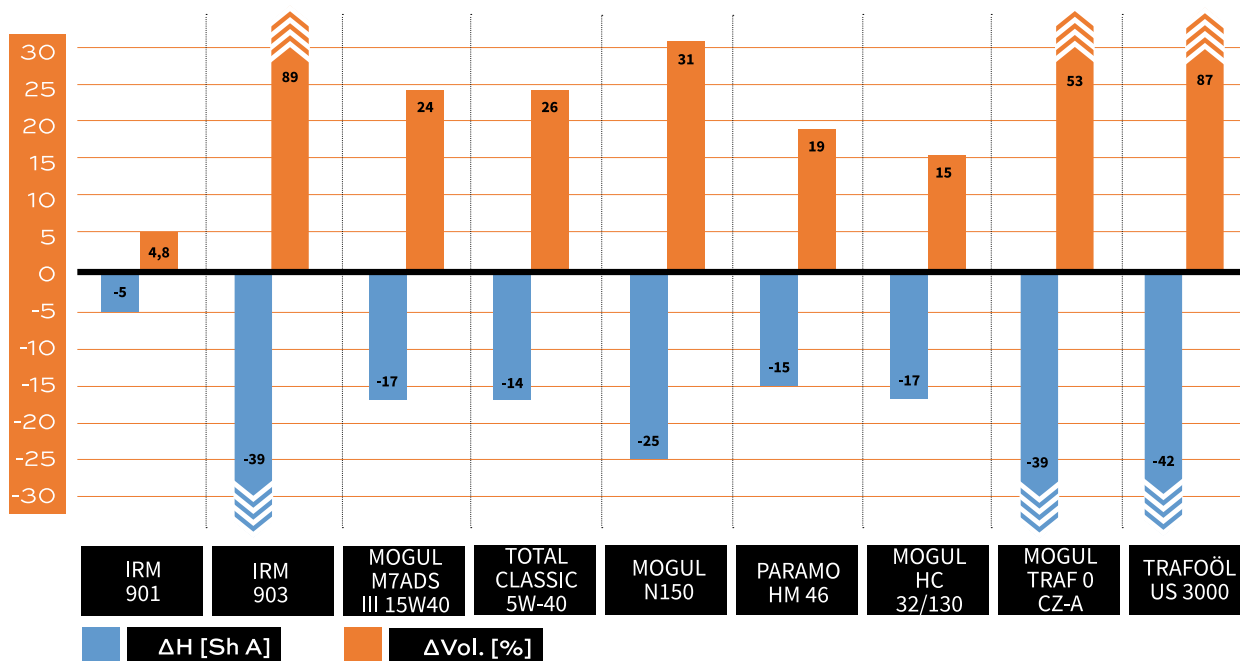


RUBBER FLOORING FINE RIBBED — S2-EPDM96



EXTERIOR	80 +/- 5	Sh A	3	mm	3.5	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

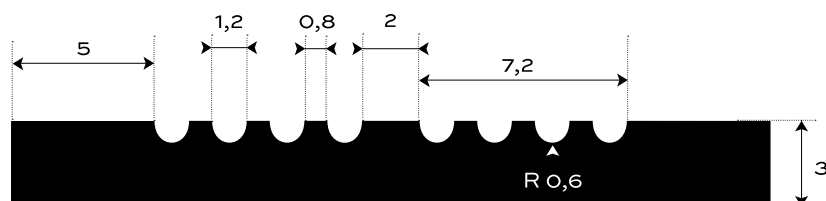

Bottom side - cloth impression

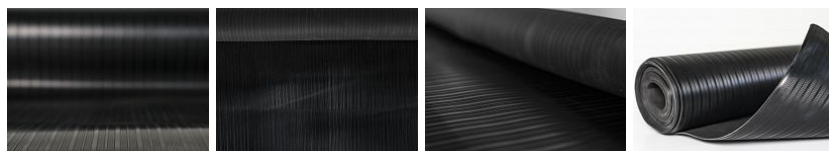

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED — S2-EPDM95



EXTERIOR	70 +/- 5	Sh A	3	mm	3.5	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

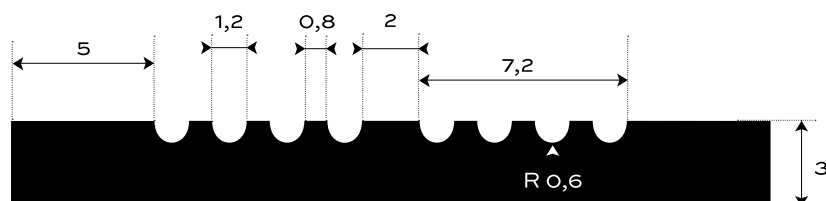

Bottom side - cloth impression

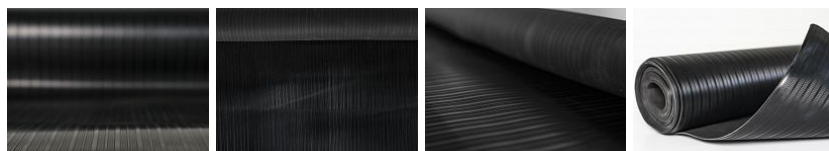

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING FINE RIBBED — S2-EPDM15



EXTERIOR	60 +/- 5	Sh A	3	mm	3.4	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

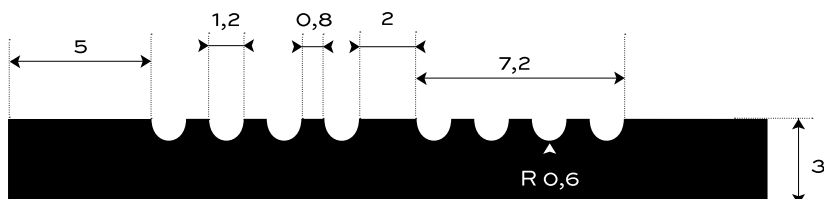

Bottom side - cloth impression

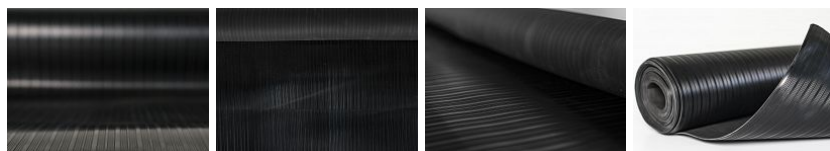

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, heat-resistant in black color. In standard thickness 3 mm. It weighs 3.4 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

3 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------

1000 mm	(+/- 10 mm)
---------	-------------


LENGTH

10 m	(+/- 200 mm)
------	--------------


RUBBER FLOORING WIDE RIBBED OIL RESISTANT - S1-NBR72



INTERIOR ENVIRONMENT	70 +/- 5 Sh A HARDNESS	4 mm THICKNESS	3.8 kg/m ² BASIS WEIGHT
-------------------------	---------------------------	-------------------	---------------------------------------

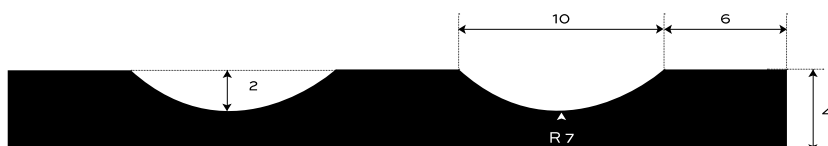

Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	MEDIUM RESISTANT
Transformer oil resistance	HIGHLY RESISTANT
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	HIGHLY RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern of the S1 type, oil-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)

S1 — NBR72

RUBBER FLOORING WIDE RIBBED OIL RESISTANT - S1-NBR72


7672 SWELLING RATES

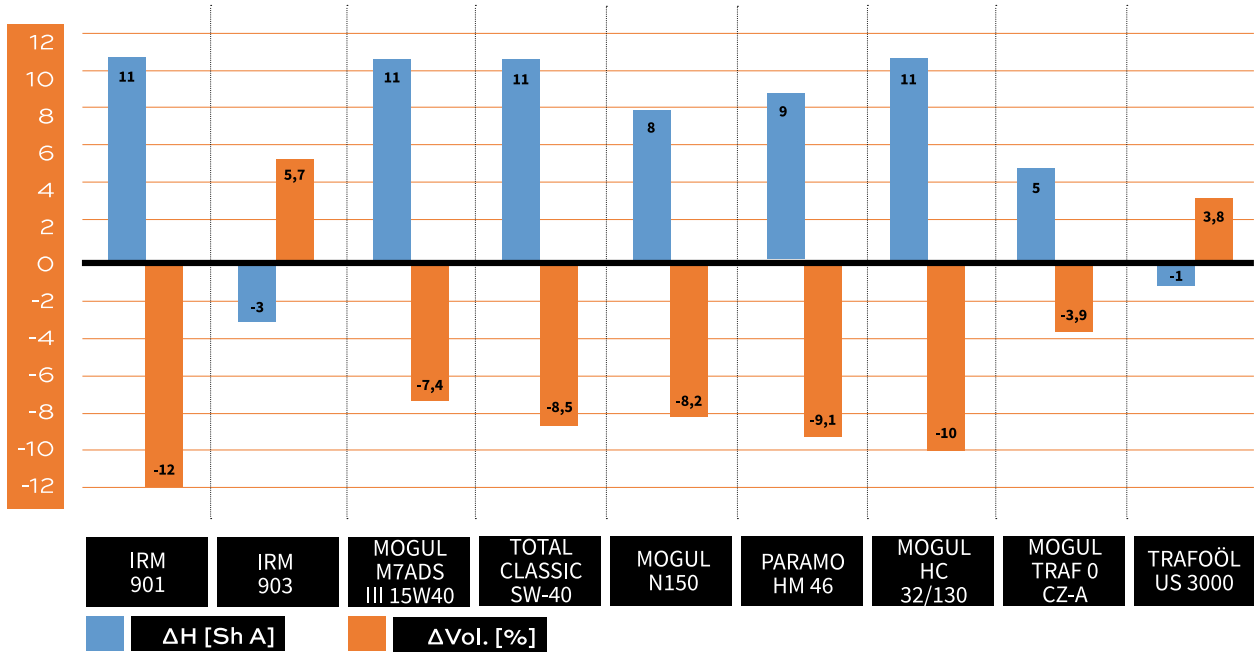


RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S1-NBR45



INTERIOR ENVIRONMENT	65 +/- 5 HARDNESS	Sh A	4 THICKNESS	mm	4.9 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------



Bottom side - cloth impression



ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

RESISTANCE

Alkaline resistance	NO
Acid resistance	NO
Oil resistance	HIGHLY RESISTANT
Gasoline resistance	MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved pattern of the S1 type, oil-resistant in black. In standard thickness 4 mm. It weighs 4.8 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm	(+/- 0,3 mm)
------	--------------

WIDTH

1200 mm	(+/- 10 mm)
---------	-------------


1000 mm	(+/- 10 mm)
---------	-------------

LENGTH

10 m	(+/- 200 mm)
------	--------------

RUBBER FLOORING WIDE RIBBED OIL-RESISTANT - S1-NBR45


7645 SWELLING RATES

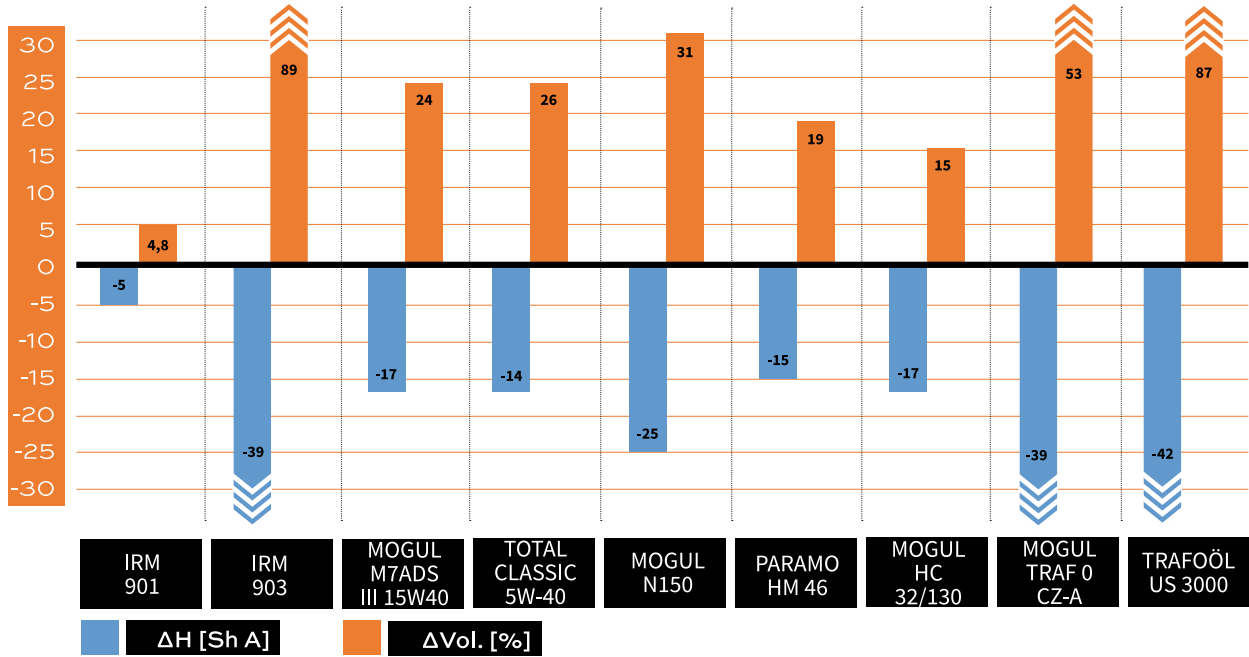


RUBBER FLOORING WIDE RIBBED — S1-EPDM96



EXTERIOR	80 +/- 5	Sh A	4	mm	3.8	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

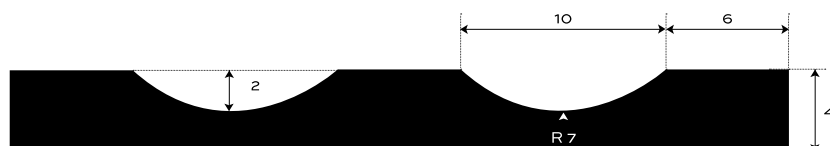

Bottom side - cloth impression

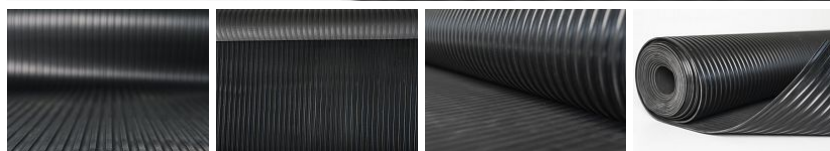

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S1, heat-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING WIDE RIBBED — S1-EPDM95



EXTERIOR	70 +/- 5	Sh A	4-5	mm	3.8-4.8	kg/m²
ENVIRONMENT	HARDNESS		THICKNESS		BASIS WEIGHT	

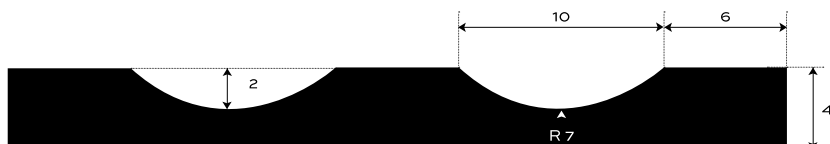

Bottom side - cloth impression

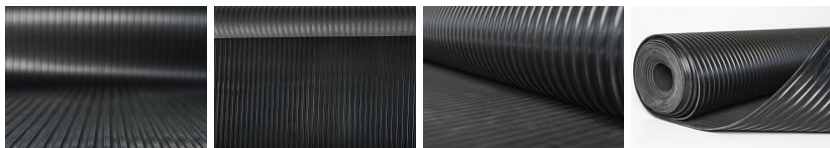

ADDITIONAL INFORMATION

Temperature range -40/+100 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S1, heat-resistant in black. In standard thickness 4 mm. It weighs 3.6 kg / m². Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

5 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)


LENGTH

10 m (+/- 200 mm)


RUBBER FLOORING WIDE RIBBED — S1-EPDM15



EXTERIOR ENVIRONMENT	60 +/- 5 HARDNESS	Sh A	4 THICKNESS	mm	3.7 BASIS WEIGHT	kg/m ²
-------------------------	----------------------	------	----------------	----	---------------------	-------------------



Bottom side - cloth impression

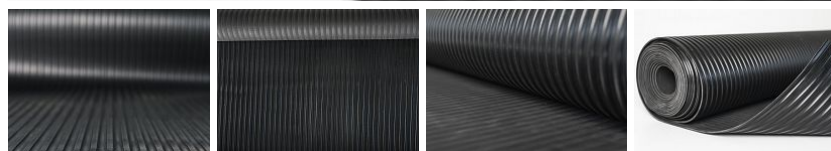

ADDITIONAL INFORMATION

Temperature range -40/+125 °C.

RESISTANCE

Weather resistance	HIGHLY RESISTANT
Ozone resistance	HIGHLY RESISTANT
UV resistance	HIGHLY RESISTANT
Alkaline resistance	HIGHLY RESISTANT
Acid resistance	HIGHLY RESISTANT
Oil resistance	MEDIUM RESISTANT
Gasoline resistance	NO

Rubber roofing for interior and exterior surfaces. Durable and easy to maintain with easy handling. In a wide ribbed pattern type S1, heat-resistant in black. In standard thickness 4 mm. It weighs 3.5 kg / m2. Specify in the configurator.

CONFIGURATION OPTIONS

THICKNESS

4 mm (+/- 0,3 mm)

WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

LENGTH

10 m (+/- 200 mm)