


RED RUBBER SHEETING FOR GENERAL USE 7669 — SBR



65 +/- 5 **Sh A** 6 **MPa** 1,53 **g/cm³** 400 **%** -25 - +70 **°C** 1-10 **mm**
HARDNESS **TENSILE STRENGTH** **DENSITY** **ELONGATION** **TEMPERATURE RANGE** **THICKNESS**

Sealing plate intended for general use without special requirements for resistance to negative environmental influences. Made on the basis of the SBR rubber compound in red. With the possibility of specifying the required thickness (1 - 10 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.

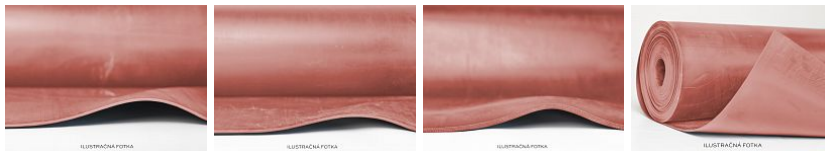

RESISTANCE

Weather resistance NO
 Ozone resistance NO
 UV resistance NO
 Alkaline resistance NO
 Acid resistance NO
 Oil resistance NO
 Gasoline resistance NO

CONFIGURATION OPTIONS

THICKNESS

| | |
|--------|--------------|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |

WIDTH

| | |
|---------|-------------|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

LENGTH

| | |
|------|--------------|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |

NUMBER OF REINFORCEMENT LAYERS

| | |
|------------------------------|-----------------------------|
| without reinforcement layers | (for thicknesses 1 - 10 mm) |
| | |
| 1 reinforcement layer | (for thicknesses 2 - 10 mm) |
| | |
| 2 reinforcement layers | (for thicknesses 3 - 10 mm) |