7672 — NBR-SBR

# RUBBER SHEETING OIL RESISTANT 7672 — NBR-SBR

[redacted]

| ENVIRONMENT | DENSITY | TEMPERATURE RANGE | HARDNESS | ELONGATION | TENSILE STRENGTH | THICKNESS |
|---|---|---|---|---|---|---|
| INTERIOR | 1.3 g/cm³ | -25 – +100 °C | 70 +/- 5 Sh A | 250 % | 8 MPa | 1 -15 mm |

Sealing plate designed for the environment in which it comes into contact with mineral oils (NBR45 series) and gasoline, resp. isooctanes (higher NBR72 series). Made from a synthetic mixture of NBR-SBR rubbers with suitable properties. With the possibility of specifying the required thickness (1 - 15 mm), width (1,200 - 1,400 mm) and number of inserts (0 - 2 pcs). Click and choose. Complete the exact specification in the configurator.



## ADDITIONAL INFORMATION

Temperature range -25/+100 °C

## RESISTANCE

| | |
|---|---|
| Alkaline resistance | NO |
| Acid resistance | MEDIUM RESISTANT |
| Transformer oil resistance | HIGHLY RESISTANT |
| Oil resistance | HIGHLY RESISTANT |
| Gasoline resistance | HIGHLY RESISTANT |

## CONFIGURATION OPTIONS

### THICKNESS

| | |
|---|---|
| 1 mm | (+/- 0,2 mm) |
| 1.5 mm | (+/- 0,2 mm) |
| 2 mm | (+/- 0,2 mm) |
| 3 mm | (+/- 0,3 mm) |
| 4 mm | (+/- 0,4 mm) |
| 5 mm | (+/- 0,5 mm) |
| 6 mm | (+/- 0,5 mm) |
| 8 mm | (+/- 0,6 mm) |
| 10 mm | (+/- 0,6 mm) |
| 12 mm | (+/- 1,0 mm) |
| 15 mm | (+/- 1,0 mm) |

### WIDTH

| | |
|---|---|
| 1200 mm | (+/- 10 mm) |
| 1400 mm | (+/- 10 mm) |

### LENGTH

| | |
|---|---|
| 20 m | (+/- 200 mm) |
| 10 m | (+/- 200 mm) |
| 5 m | (+/- 200 mm) |

### NUMBER OF REINFORCEMENT LAYERS


| | |
|---|---|
| without reinforcement layers | (for thicknesses 1 - 15 mm) |
| 1 reinforcement layer | (for thicknesses 2 - 15 mm) |
| 2 reinforcement layers | (for thicknesses 3 - 15 mm) |

BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk

7672 — NBR-SBR

# RUBBER SHEETING OIL RESISTANT 7672 — NBR-SBR

## 7672 SWELLING RATES

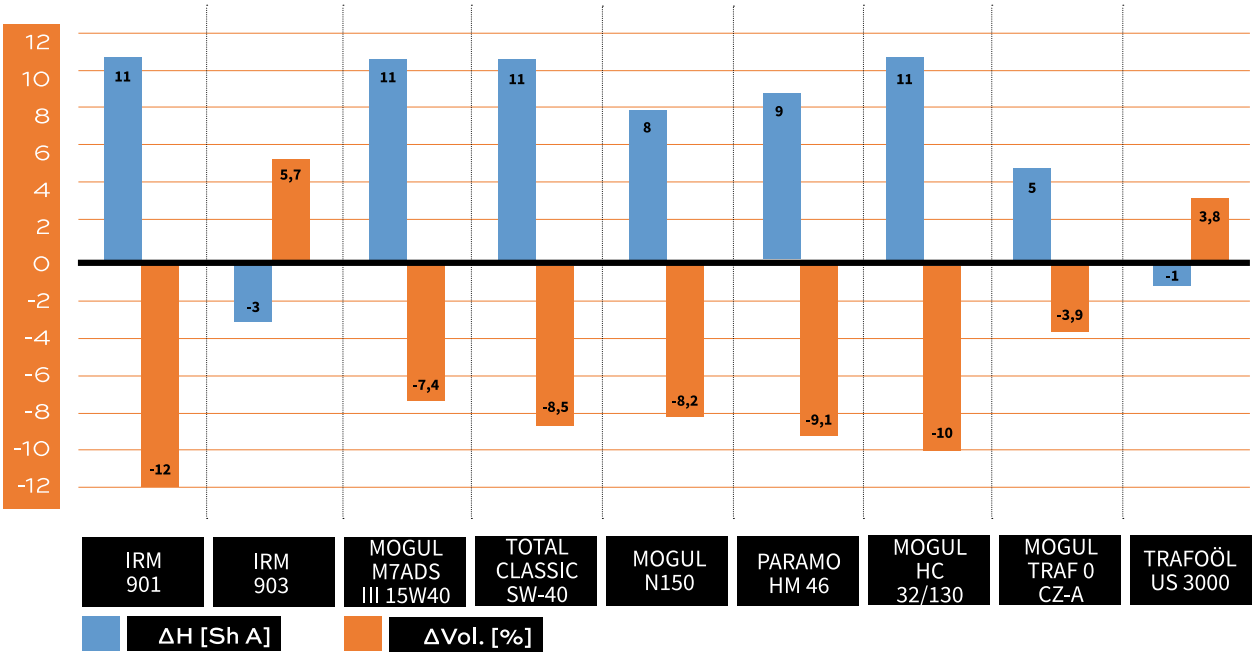


BOGUMA, Ltd., Továrenská 314, 956 18 Bošany, Slovak Republic
Business Register Record, Trenčín, Section Ltd., Record No. 19109/R
IČO: 35 922 087, IČ DPH: SK2021963625
Billing Information: SK52 0900 0000 0052 4549 4451, SWIFT: GIBASKBX
Tel.: +421 38 5426 307, +421 38 5426 308, sales@boguma.sk, www.boguma.sk