

# RUBBER FLOORING WIDE RIBBED — S1- SBR-COLOR




<b>INTERIOR</b>	80 +/- 5	<b>Sh A</b>	4	<b>mm</b>	4.5 -4.8	<b>kg/m<sup>2</sup></b>
<b>ENVIRONMENT</b>	<b>HARDNESS</b>		<b>THICKNESS</b>		<b>BASIS WEIGHT</b>	



Bottom side - cloth impression



ILUSTRÁČNÁ FOTKA

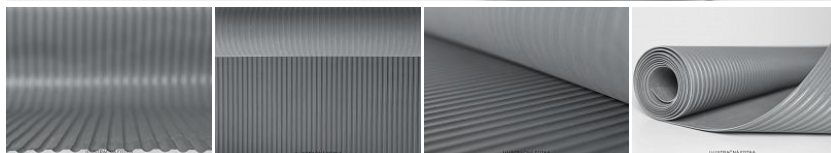

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C

## RESISTANCE

Weather resistance	NO
Ozone resistance	NO
UV resistance	NO
Alkaline resistance	NO
Acid resistance	NO
Oil resistance	NO
Gasoline resistance	NO

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a wide grooved design of the S1 type, in the basic design in three colors: gray, blue and green. In standard thickness of 4 mm. It weighs 4.8 kg / m<sup>2</sup>. Finish your specification in configurator.

## CONFIGURATION OPTIONS

### THICKNESS

4 mm (+/- 0,3 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)