



# RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45



<b>INTERIOR</b>	65 +/- 5	<b>Sh A</b>	3	<b>mm</b>	4.6	<b>kg/m<sup>2</sup></b>
<b>ENVIRONMENT</b>	<b>HARDNESS</b>		<b>THICKNESS</b>		<b>BASIS WEIGHT</b>	



Bottom side - cloth impression

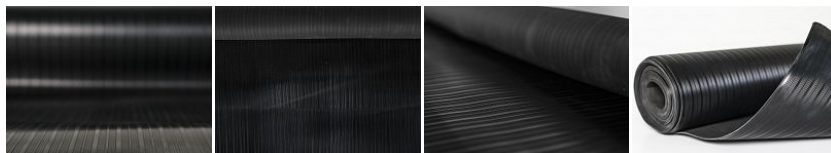

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

## RESISTANCE

Alkaline resistance NO  
 Acid resistance NO  
 Oil resistance HIGHLY RESISTANT  
 Gasoline resistance MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and low maintenance with easy handling. In a finely grooved pattern of the S2 type, oil-resistant in black color. In standard thickness 3 mm. It weighs 4.6 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

3 mm (+/- 0,3 mm)

### WIDTH

1200 mm (+/- 10 mm)

1000 mm (+/- 10 mm)

### LENGTH

10 m (+/- 200 mm)

# RUBBER FLOORING FINE RIBBED OIL-RESISTANT - S2-NBR45

## 7645 SWELLING RATES

