



# RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR45



<b>INTERIOR</b>	65 +/- 5	<b>Sh A</b>	4 -10	<b>mm</b>	6.3 -16.9	<b>kg/m<sup>2</sup></b>
<b>ENVIRONMENT</b>	<b>HARDNESS</b>		<b>THICKNESS</b>		<b>BASIS WEIGHT</b>	



Bottom side - cloth impression

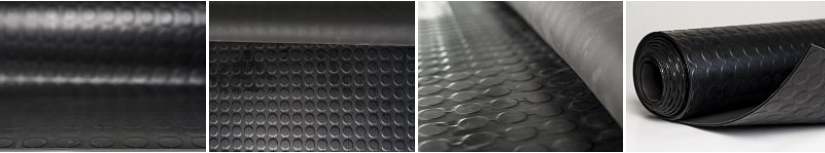

## ADDITIONAL INFORMATION

Temperature range -25/+80 °C, short-term +90 °C.

## RESISTANCE

Alkaline resistance NO  
 Acid resistance NO  
 Oil resistance HIGHLY RESISTANT  
 Gasoline resistance MEDIUM RESISTANT

Rubber roofing for interior surfaces. Durable and easy to maintain with easy handling. With coin pattern (round stud) type S8, oil-resistant in black. In standard thickness 4 mm. It weighs 6.6 kg / m<sup>2</sup>. Specify in the configurator.

## CONFIGURATION OPTIONS

### THICKNESS

4 mm	(+/- 0,3 mm)
5 mm	(+/- 0,5 mm)
6 mm	(+/- 0,5 mm)
8 mm	(+/- 0,6 mm)
10 mm	(+/- 0,6 mm)

### WIDTH

1230 mm	(+/- 10 mm)
---------	-------------

### LENGTH

10 m	(+/- 200 mm)
------	--------------

# RUBBER FLOORING COIN PATTERN OIL-RESISTANT - S8-NBR45

## 7645 SWELLING RATES

